


# OUTDOOR Wallpack



Outdoor SERIES

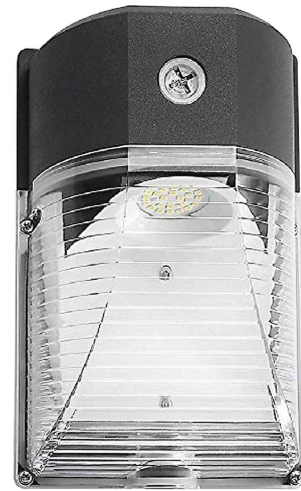

## PRODUCT OVERVIEW

The **AL TSA Outdoor Wallpack** lights replaces traditional HID bulkheads while consuming up to 80% less energy and operating for up to 50,000 hours. Powered by high performance, energy-efficient LED chip sets. The **AL TSA Outdoor Wallpack** produces bright and long-lasting illuminations. It also reduces shadowing and creates a safer night-time environment while saving energy and maintenance costs.

Quality comes standard...



Hours  
LIFESPAN



IP65  
OUTDOOR



Low  
MAINTENANCE



Year  
WARRANTY



Product  
CERTIFICATION

### APPLICATIONS

Industrial Areas

Commercial Areas

Warehouses & Stores

Workshops

### CONSTRUCTION DETAILS

Aluminium

Glass Lens

IK08 Impact Resistance

Impact Resistant Net

### FEATURES

High Reliability LED chip sets

High Reliability Power Supplies

Lifetime 50,000hrs

5 Year Warranty

Colour Rendering Index >80

Temperature: -20°C ~ 50°C

Certified: ETL/cETL, DLC

Easy Installation

Power Factor >0.95


Environmentally Friendly

## Outdoor Wallpack | Technical Data

MODEL No.:	VOLTAGE (V)	POWER (W)	LUMEN (lm)	BEAM ANGLE	CRI	CCT (K)	SIZE (MM)	LED TYPE	IP
WD-WP18A/*/**	100-277VAC	18	110-120	108°	>80	2200-6000	210x140x90	2835	IP65
WD-WP30A/*/**	100-277VAC	30	110-120	108°	>80	2200-6000	210x140x90	2835	IP65
WD-WP50B/*/**	100-277VAC	50	120-130	120°	>80	2200-6000	360x235x187	2835	IP65
WD-WP80B/*/**	100-277VAC	80	120-130	120°	>80	2200-6000	360x235x187	2835	IP65
WD-WP120B/*/**	100-277VAC	120	120-130	120°	>80	2200-6000	360x235x187	2835	IP65

\* **Body Colour:** White (WH) / Black (BK)

\*\* **Colour Temperature:** 2200-3000K (02) / 4000K (04) / 6000K (06)

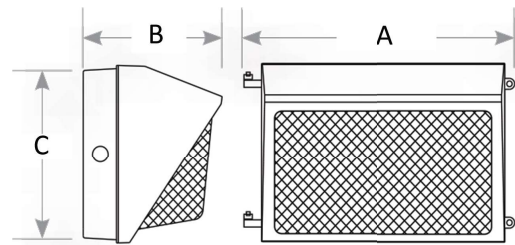

## MECHANICAL DATA

Lamp Description:	Hongli 2835
Size Description:	210x140x90 360x235x187
Operating Temperature:	-20°C ~ 50°C
Housing Material:	Aluminium
Lens Material:	Glass With IK08 Impact Resistance & Impact Resistant Net
Glare Index:	UGR22
Housing Finish:	Black
IP Rating	IP65
Mounting Configuration:	Surface
Flicker Specification:	SVM<0.4

## ELECTRICAL DATA

		FEATURES
Driver:	GreenEN	EMC Applicable Standards
Electrical Class:	Class 1	Dali Control
Nominal Voltage Range:	100 - 277 VAC	1-10V Control
Power Factor:	>0.95	Triac Dimmable
THD:	12%	Battery Backup 20% 30-90 Minutes
Surge Protection:	Standard 1000V- Optional 2750V	Motion Sensor
Cable Entry:	Bottom	External Photocell
Tridonic:	Optional	
Vossloh Shwabe:	Optional	